

NetWay5PWPN

5-Port Hardened PoE+ Switch



Altronix Netway5PWPN hardened PoE+ switch provides power for up to four (4) IP devices, such as PoE access controllers and cameras – utilizing a single Ethernet cable going to the headend. Other applications may include solar power, as well as integrating network door access systems with video surveillance.

For managed switch see model NetWay5PQWPN.



NetWay5PWPN

Key Features

- Four (4) 10/100/1000 Mbps PoE/PoE+ (up to 30W) ports
- IEEE 802.3af (15W) and IEEE 802.3at (30W) compliant
- 120W total power
- PoE activity LED indicators
- NEMA4/4X, IP66 Rated enclosure for outdoor use
- CE European Conformity
- Lifetime Warranty

Similar products

NetWay5PWPX	Outdoor 5-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries
NetWay5PWP	Outdoor 5-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure
NetWay5PX	Indoor 5-port PoE+ Hardened Switch in NEMA 1 Rated indoor enclosure
NetWay5P	5-port PoE+ Hardened Switch (board only)

Accessories (order separately)



PMK1

PMK1 - Pole Mount Kit

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8"(diameter) poles.

Lifetime Warranty

Specifications

Input Power	12 or 24VDC from a UL Listed power source or a solar panel with nominal 24V (~12-35V) output
Power Consumption	6W (0.25A@24V or 0.5A@12V)
Power Output	
Maximum Power	Four (4) 10/100/1000 Mbps PoE/PoE+ (rated up to 30W) ports 60W (at 12VDC) or 120W (at 24VDC) total power Integral surge protection
Uplink Port	Single data port
Ethernet Ports	
Five (5) 10/100/1000 Mbps ports	
Connectivity: RJ45, auto-crossover	
Wire type: 4-pair CAT5e or higher structured cable	
Distance: up to 100m	
Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation	

Indicators (LED)

Individual PoE On LEDs for each port
Individual IP Link status, 10/100Base-T/active LEDs for each port

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (L x W x H)

Enclosure:
9.32" x 7.32" x 4.92" (236.7mm x 185.9mm x 125mm)
Shipping:
13" x 10" x 7" (330.2mm x 254mm x 177.8mm)

Weight (approx.)

Product: 2.2 lb. (1.01 kg)
Shipping: 3.2 lb. (1.45 kg)


Temperature

Operating: -30°C to 70°C (-22°F to 158°F)
Storage: -40°C to 85°C (-40°F to 185°F)

Relative Humidity 85% +/- 5%

Operating Altitude: -304.8 to 2,000m

Typical Application

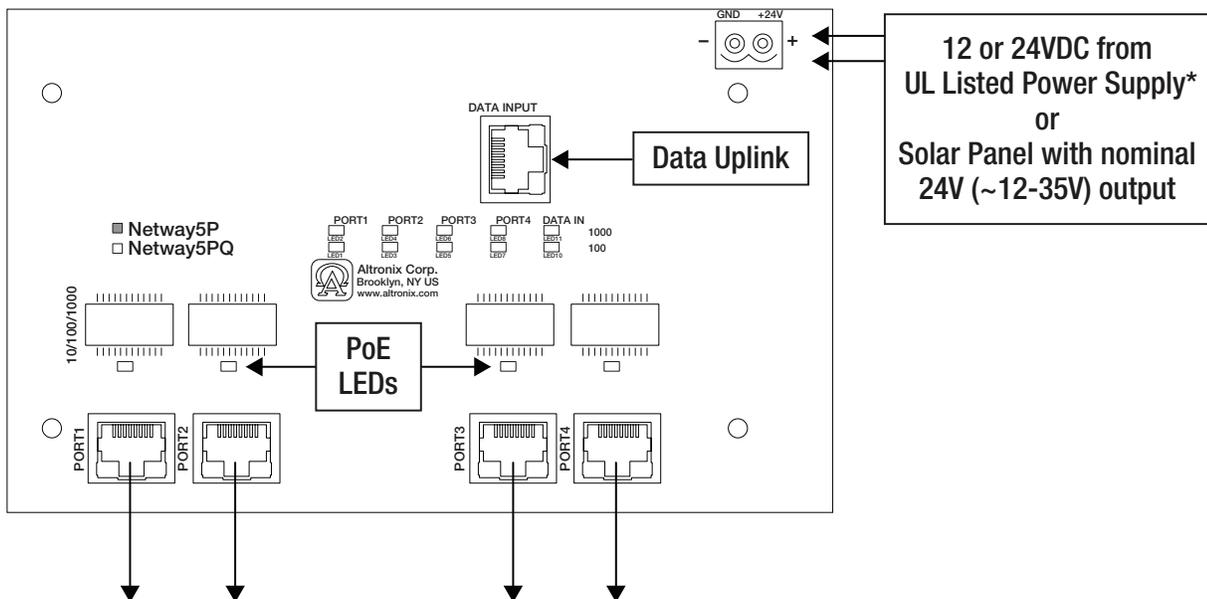


Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)

9.32" x 7.32" x 4.92" (236.7mm x 185.9mm x 125mm)

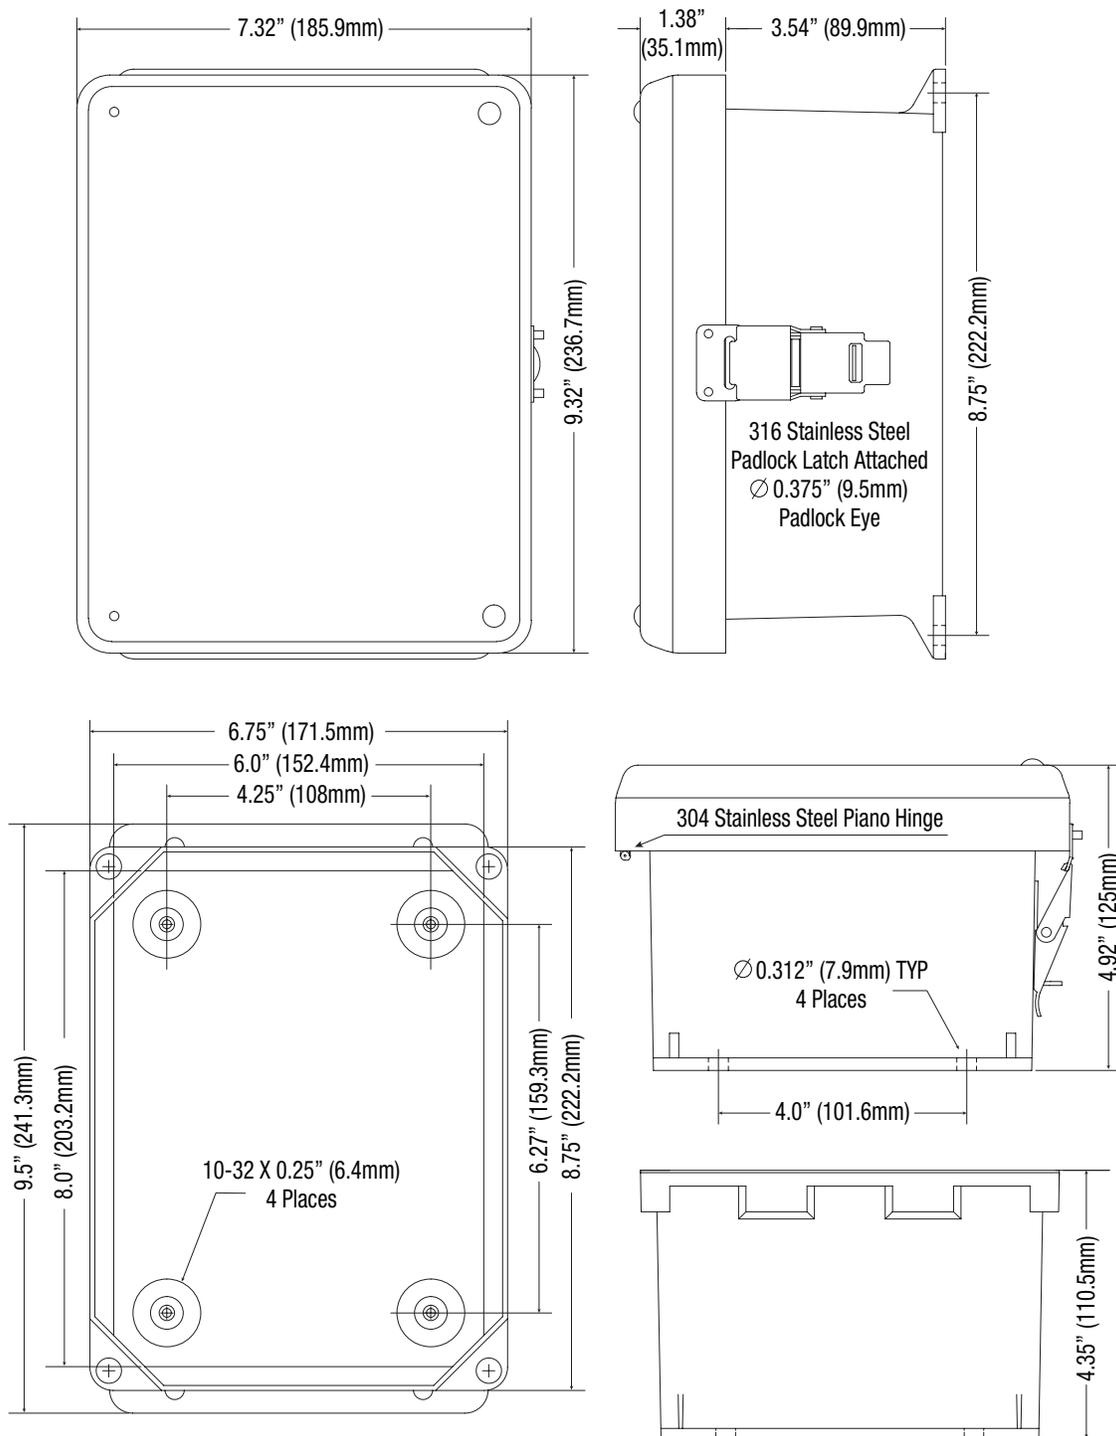

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com